



3 Zone Thermal Shock Test Chamber




Energy Conservation

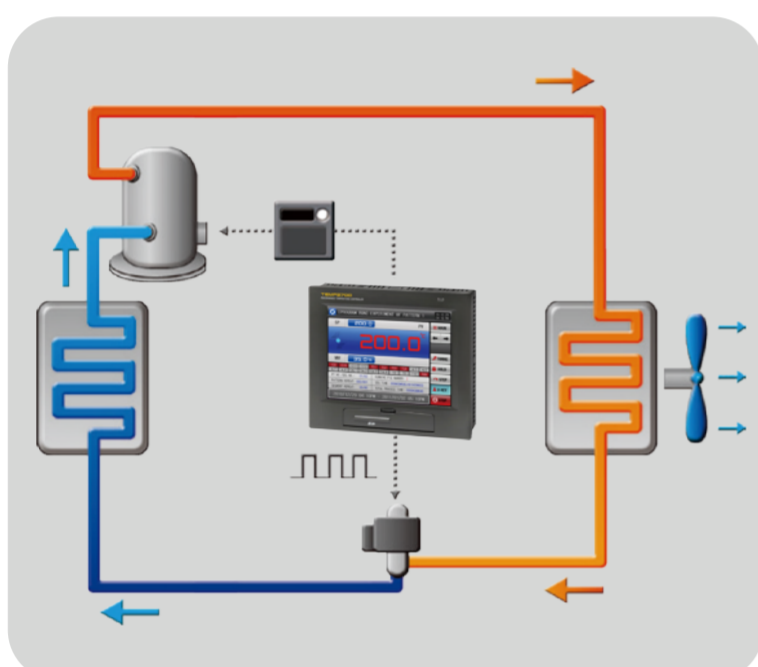

Remote network system

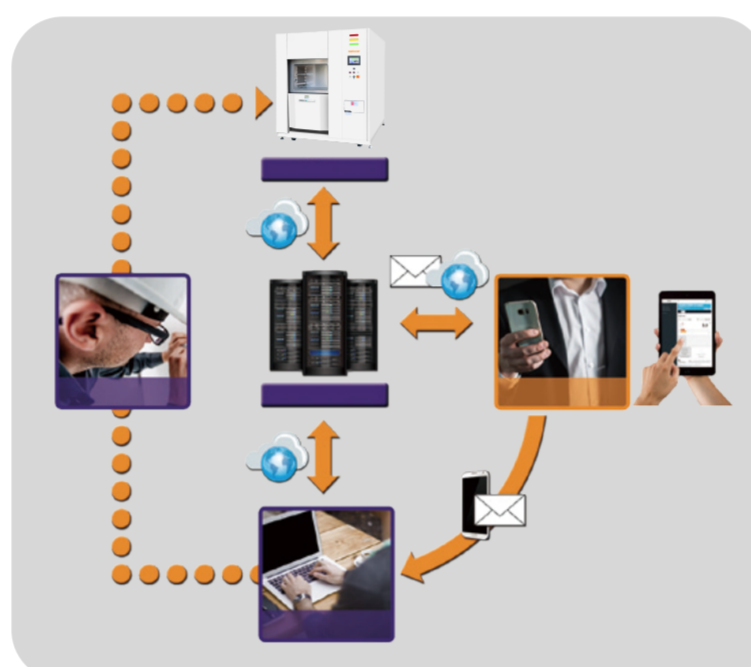

Circuit System

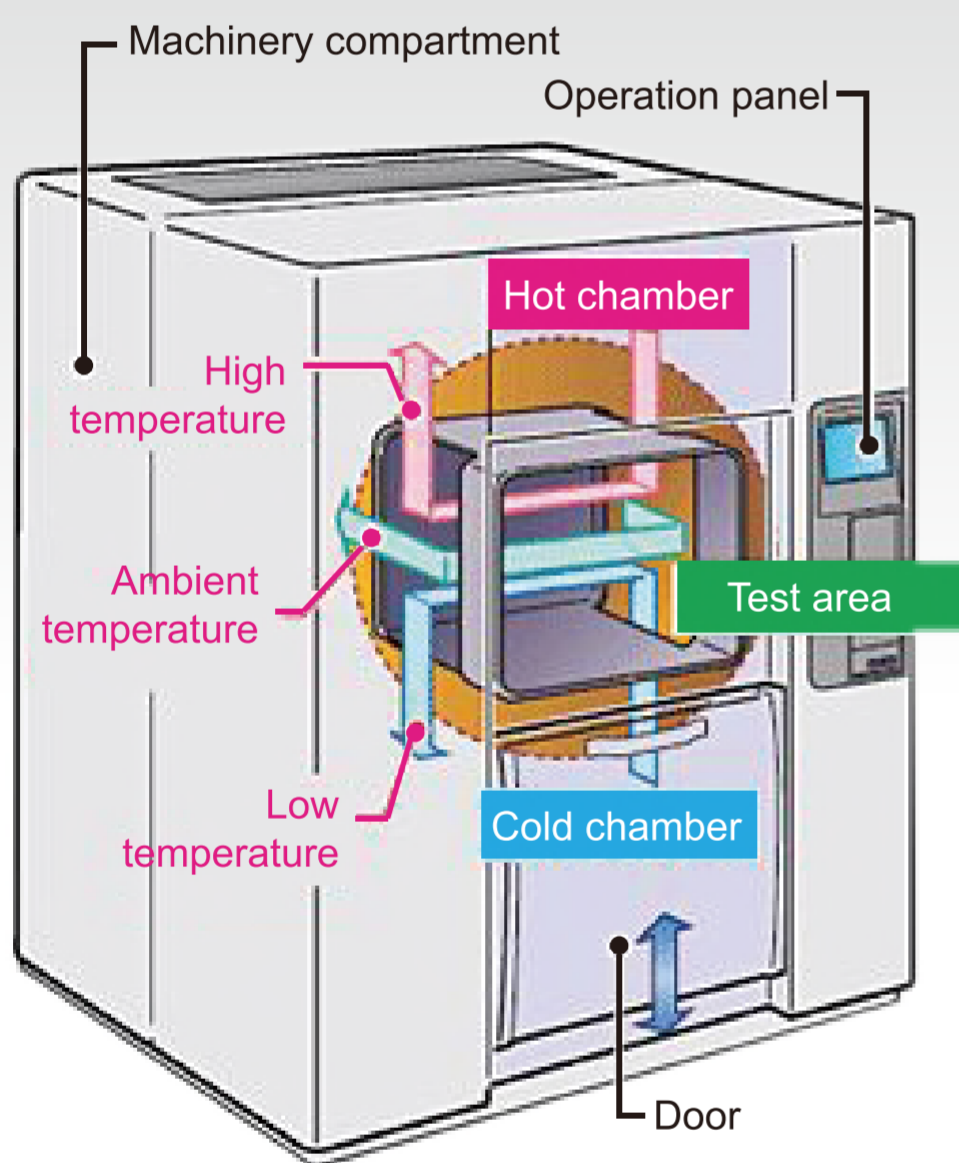

• Specifications

Model	SM-50-3P-A	SM-80-3P-A	SM-150-3P-A	SM-200-3P-A	SM-300-3P-A	SM-500-3P-A	
Temperature	Temperature impact range	-55°C~150°C (A:-40°C~150°C;B:-55°C~150°C;)					
	Temperature fluctuation	±1.0°C					
	Low temperature precooling time	25.0°C~-70.0°C Within 60 mins 1.0~3.0°C/min					
	High temperature preheating time	25.0°C~200.0°C Within 60 mins 3.0~7.0°C/min					
	Temperature conversion time	SANWOOD Environmental Test Chambers 3S					
	Temperature recovery time	Within 5 mins			Within 10 mins		
	Material / components	Internal material	Stainless steel(SUS304)				
External material		Cold rolled steel sheet / powder spraying					
Heat insulating material		100mm thickness poly urethane plate+10mm thickness mineral wool					
Fan		Centrifugal blower					
Compressor		France Tecumseh, Germany Bock, Germany Bitzer					
Condenser		Air cooling, water cooling			water cooling		
Refrigerant		R404A, R23, R508					
Evaporator		Fin - and - Tube Heat Exchanger					
Size	Heater	Nickel chromium alloy heating wire					
	Interior size(mm) W*H*D	350*400*350	400*500*400	500*600*500	650*460*670	960*460*670	960*650*800
	Outer size(mm) W*H*D	1400*1750*1750	1450*1850*1800	1550*2050*2050	1700*2000*2200	2050*2000*2250	2050*2150*2450
	Volume (L)	50L	80L	150L	200L	300L	500L
Power supply	380V AC 50/60Hz						
Controller	SANWOOD SH5600:Equipped with RS232 port; (7.0 inch controller) USB data export)						

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc



Mobile phone scan can visit our official website